
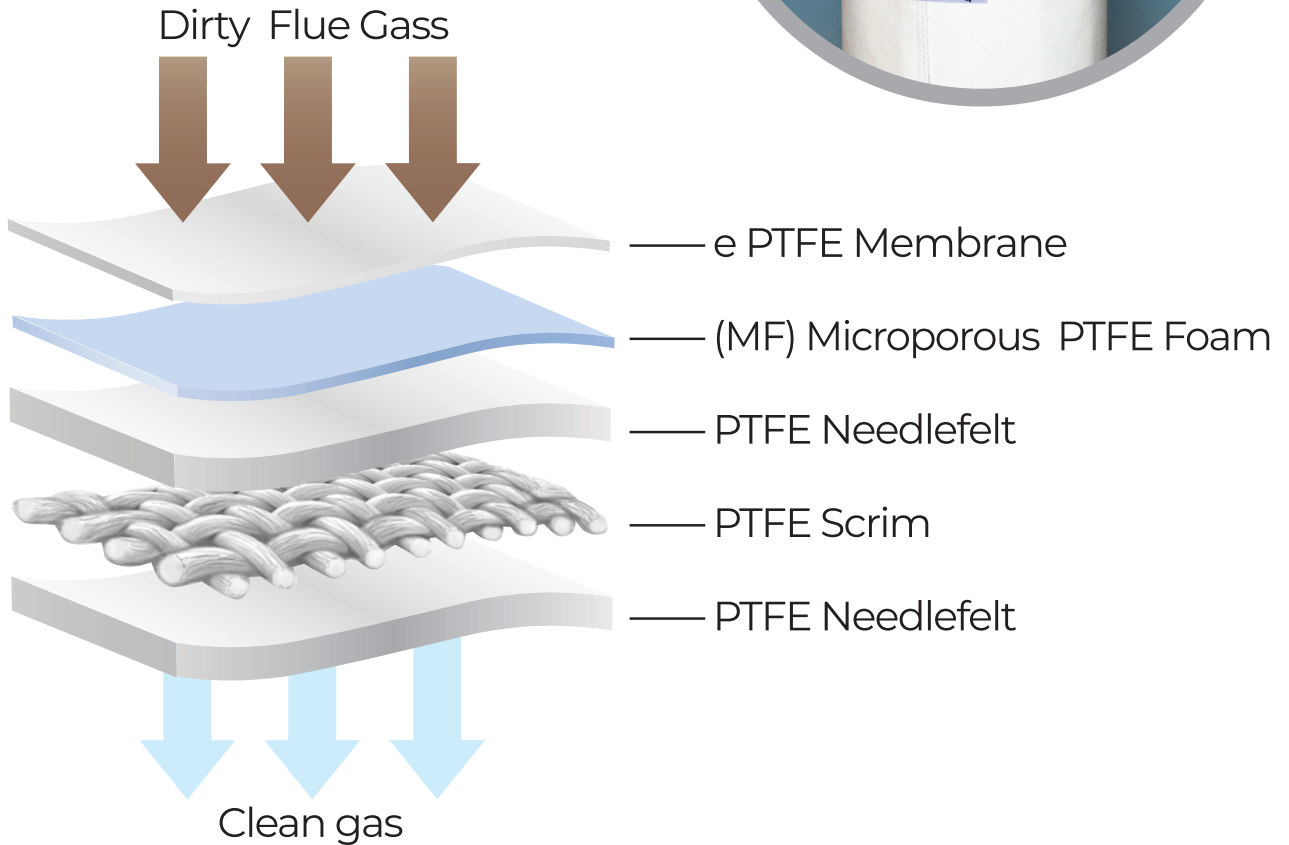


FleurX[®]

T-750-XTM

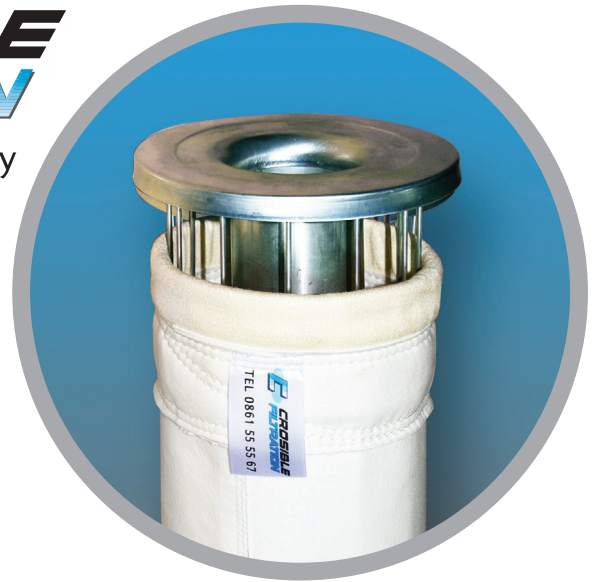

- **100%** Inert to almost all **Mineral** and **Organic Acids & Alkalines**
- **100%** Resistant to **Oxydation**
- **100%** Resistent to **Hydrolysis**

Thermal operating temp 260 - 300 ° C Surge

Weight 750g / m²

Emissions 0.3 µm (Emissions ≤ 10 mg / Nm³)

